print more. efficiency built in ▪▪▪
Relax for 5 years[1] with our **LONGEVITY** service pack

smart design. tco included
Up to 20% reduction in consumable use and energy consumption**. Optimized waste related expenses.

easy and mistake proof operation
Clean and secure, our innovative cartridge system requires no set-up and eliminates consumable management errors.

HYGIENIC DESIGN. EFFICIENT WASHDOWN (IP56)
Clean it with pressured water and industrial detergent and make sure your hygiene standards are met.

99.9% Availability
Secure the initial performance of your equipment for 36, 48, or 60 months via the customized service packs.

code beyond the message ▪▪▪
Support your marketing campaigns while achieving your traceability and sustainability goals

PROMOTIONAL CODING FUNCTION
Helps you carry out your marketing initiatives and campaigns by simply inserting a USB thumb drive.

large choice of codes and languages
Text, logos and 2D barcodes, etc. available in 35 languages.

inks that help achieve your traceability and sustainability goals
Ink references with a high level of adhesion, contrast and color where needed as well as anti-counterfeiting solutions and environmentally-friendly inks.

20% faster*
Don't let other market brands slow you down.

-Imaje subsidiary.

prevent product recalls and waste ▪▪▪
Enhanced user experience coupled with the latest vision system to ensure your product is coded right and scrap is kept to a minimum

Mark and read it directly on your printer. code secured
Code integrity is automatically checked via the new embedded vision system allowing you to avoid product waste.

TRACK YOUR RUNNING COSTS
Smart monitoring system. Easy access to maintenance and production history (availability rate, additive consumption and number of printed messages).

ENHANCED USER EXPERIENCE
Configure the job and lock it directly on the color touch screen

centrally manage codes
Create images and network printers with optional CoLOS® software.

Print features

▸ Mono-jet printhead
▸ G head (printing resolution: 71 dpi)
▸ M head (printing resolution: 115 dpi)
▸ Up to 5 lines of print

Model name	9450	9450E/S
Print speed	396m/min	1,000m/min

▸ Font height from 5 to 32 dots
▸ Character height: from 1.0 to 11.2 mm
▸ Wide choice of 1D and 2D barcodes: EAN8/EAN13/ UPCA/UPCE barcodes, code 39, interleaved 2 of 5, Datamatrix, QR code
▸ Wide choice of characters: Latin, Arabic, Cyrillic, Hebrew, Japanese, Chinese, Korean, etc.

Operations

▸ Message library (up to 1000 messages)
▸ International operator/machine interface with a wide choice of languages
▸ WYSIWYG 7-inch wide touch screen: realtime display of remaining print capacity expressed in hours and number of messages; integrated assistance and alert system; simplified message printing and management; creation of user profiles; tracking of consumption and printer availability
▸ USB and SD ports
▸ Jet Speed Control guarantees marking quality
▸ Automatic selection of fonts, depending on print speed and printhead/object distance
▸ Premium ink circuit to run all types of inks
▸ Broad range of inks: multi-use, high performance; alcohol-based, ketone-free and MEK-free inks
▸ Sealed 0.8-liter cartridges with foolproofing system
▸ Quick connect/disconnect of accessories (photocell, alarm and encoder)
▸ Parent/child connectivity
▸ Ethernet connectivity
▸ Specific date management (rounding date function)

Other characteristics

▸ Weight: 25 kg
▸ Table-top or vertical mounting
▸ Ultra-flexible 3-meter umbilical cable
▸ Stainless steel cabinet and printhead case
▸ Dust/humidity protection rating: IP56 not requiring plant air
▸ Operating temperature range: 0 to 40°C depending on ink used
▸ Humidity: 10 to 90% non-condensing
▸ Electrical power supply: 100-120 V or 200-240 V with automatic switching; frequency 50/60 Hz; power 60 VA

Options

▸ Promotional coding and Mark and Read
▸ 9450E, 9450S for pigmented ink use
▸ IP66 protection (requires plant air)
▸ Ultrarapid mode for high-speed printing
▸ Printhead pressurization kit
▸ RS-232/422 connectivity, parallel interface, many I/O possibilities to enable remote operation
▸ Ultra-flexible 6-meter umbilical cable

Accessories

▸ Printer supports: stands (stainless steel or aluminum), table or wall mounting brackets
▸ Printhead supports: stand (stainless steel) and choice of brackets
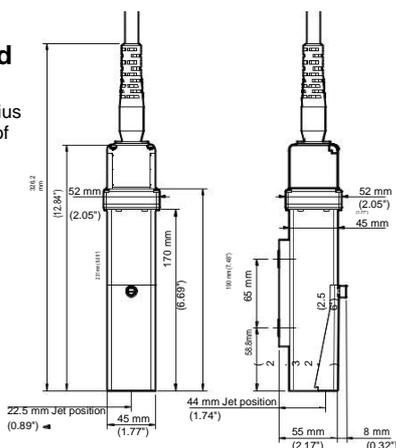▸ Photocells
▸ Encoders
▸ Alarm beacons (24 V)

Software

▸ Compatible with CoLOS Create Professional and CoLOS Enterprise
▸ Logo creation with CoLOS Graphics

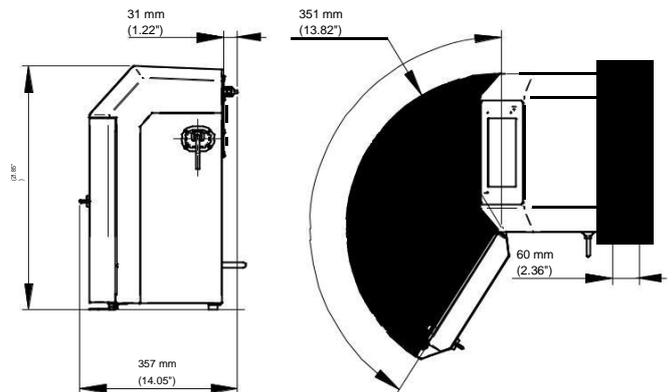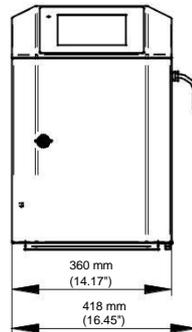| Model	9450E	9450S
OEM protocol compatibility	Komax, Schleuniger..	Tetrapak fillers, Krones Checkmat, Sidel..

Printhead

Minimum radius of curvature of the umbilical:
- Static: 100 (3.93")
- Dynamic: 150 (5.90")

Cabinet

We reserve the right to amend the design and/or specifications of our products without notice.

markem·imaje A DOVER COMPANY

To learn more, visit www.markem-imaje.com